



**GOODWE**  
YOUR SOLAR ENGINE

# Power Whenever You Need

Residential Energy Storage Solutions

# On & Off-grid Energy Storage Solutions (Newly Installed Systems)

## Summary

As a product intended for the new installation of PV storage generators, EM/ES series are aimed for boosting self-consumption in areas with high electrical rate and a relatively low FIT. For areas and regions where peak shaving can be applied and feed-in-power is restricted, this system would be a good fit.


## Functional Introduction

- **Increasing Self-Consumption:** During the day, the electricity from the PV array is used to optimize self-consumption. The excess is used to recharge the batteries and can be released to the loads at night. The highest proportion of self use is up to 95%.
- **Peak Shaving:** By setting the charging and discharging time, the battery can be charged using the lower electrical rate and discharged to loads when there is a high electrical rate.
- **Power Supply for Important Loads:** Connected to the backup side of the inverter, loads such as refrigerators, routers, lamps, computers and other small appliances can be powered. When grid fails the system automatically switches to back-up mode within milliseconds.


## System Topology Illustration

AC cable DC cable COM cable


### 01 Basic Application

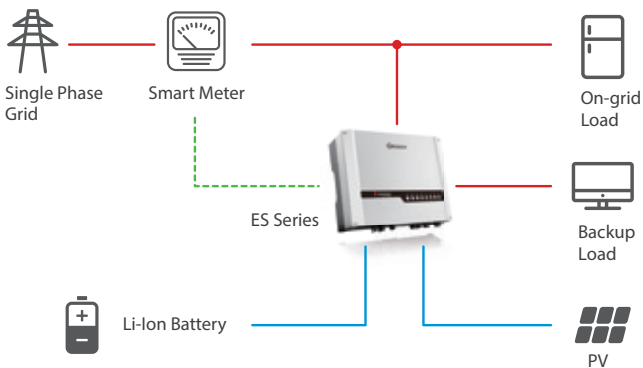

### 02 Basic Application Three Phase

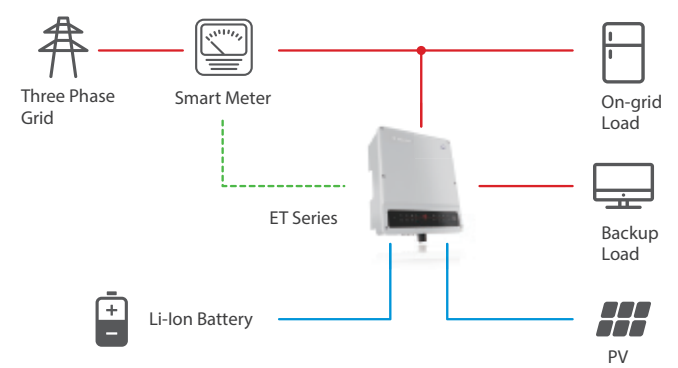

### 03 Three-phase Application Proposal

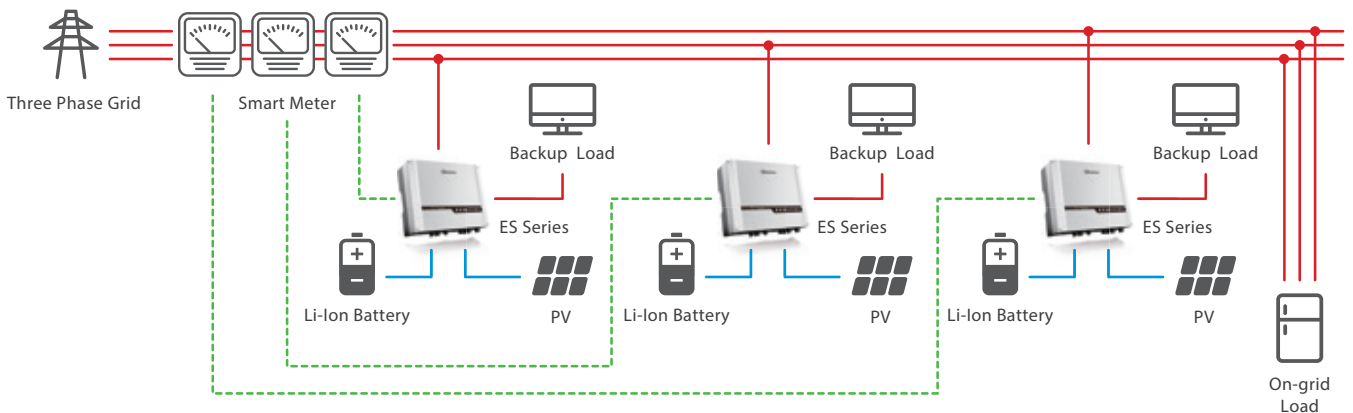

# ES Series

## Single Phase Hybrid Inverter (LV Battery)



Technical Data		GW3648D-ES	GW5048D-ES
<b>Battery Input Data</b>	Battery Type	Li-Ion or Lead-acid*1	
	Nominal Battery Voltage (V)	48	
	Max. Charging Voltage (V)	≤60 (Configurable)	
	Max. Charging Current (A)*1	75	100
	Max. Discharging Current (A)*1	75	100
	Battery Capacity (Ah)*2	50~2000	
Charging Strategy for Li-Ion Battery		Self-adaption to BMS	
<b>PV String Input Data</b>	Max. DC Input Power (W)	4600	6500
	Max. DC Input Voltage (V)*3	580	
	MPPT Range (V)	125~550	
	Start-up Voltage (V)*4	150	
	MPPT Range for Full Load (V)	170~500	
	Nominal DC Input Voltage (V)	360	
	Max. Input Current (A)	11/11	
	Max. Short Current (A)	13.8/13.8	
	No. of MPP Trackers	2	
	No. of Strings per MPP Tracker	1	
<b>AC Output Data (On-grid)</b>	Nominal Apparent Power Output to Utility Grid (VA)	3680	4600
	Max. Apparent Power Output to Utility Grid (VA)	3680*5	5100*5
	Max. Apparent Power from Utility Grid (VA)	7360	9200
	Nominal Output Voltage (V)	230	
	Nominal Output Frequency (Hz)	50/60	
	Max. AC Current Output to Utility Grid (A)	16	24.5*6
	Max. AC Current From Utility Grid (A)	32	40
	Output Power Factor	~1 (Adjustable from 0.8 leading to 0.8 lagging)	
	Output THDi (@Nominal Output)	<3%	
<b>AC Output Data (Back-up)</b>	Max. Output Apparent Power (VA)	3680	4600
	Peak Output Apparent Power (VA)*7	5520,10sec	6900,10sec
	Automatic Switch Time (ms)	10	
	Max. Output Current (A)	16	20
	Nominal Output Voltage (V)	230 (±2%)	
	Nominal Output Frequency (Hz)	50/60 (±0.2%)	
	Output THDv (@Linear Load)	<3%	
<b>Efficiency</b>	Max. Efficiency	97.6%	
	Max. Battery to Load Efficiency	94.0%	
	European Efficiency	97.0%	
<b>Protection</b>	Anti-Islanding Protection	Integrated	
	PV String Input Reverse Polarity Protection	Integrated	
	Insulation Resistor Detection	Integrated	
	Residual Current Monitoring Unit	Integrated	
	Output Over Current Protection	Integrated	
	Output Short Protection	Integrated	
	Output Over Voltage Protection	Integrated	
<b>General Data</b>	Operating Temperature Range (°C)	-25~60	
	Relative Humidity	0~95%	
	Operating Altitude (m)	≤4000	
	Cooling	Natural Convection	
	Noise (dB)	<25	
	User Interface	LED & APP	
	Communication with BMS*8	RS485; CAN	
	Communication with Meter	RS485	
	Communication with Portal	Wi-Fi	
	Weight (kg)	28	30
	Size (Width*Height*Depth mm)	516*440*184	
	Mounting	Wall Bracket	
	Protection Degree	IP65	
	Standby Self-Consumption (W)	<13	
	Topology	High Frequency Isolation	
<b>Certifications &amp; Standards</b>	Grid Regulation	VDE-AR-N 4105, VDE0126-1-1, AS4777.2, G83/2, CEI 0-21, NRS 097-2-1, EN50438	
	Safety Regulation	IEC/EN62109-1&-2, IEC62040-1	
	EMC	EN61000-6-1, EN61000-6-2, EN61000-6-3, EN61000-6-4, EN 61000-4-16, EN 61000-4-18, EN 61000-4-29	

\*1: Lead-acid battery use refers to Approved Battery Options Statement .  
The actual charge and discharge current also depends on the battery.

\*2: Under off-grid mode, then battery capacity should be more than 100Ah.

\*3: Maximum operating dc voltage is 530V.

\*4: When there is no battery connected, inverter starts feeding in only if string voltage is higher than 200V.

\*5: 4600W for VDE 0126-1-1 & VDE-AR-N4105, 4950W for AS4777.2(GW5048D-ES); 4050W for CEI 0-21 (GW3648D-ES).

\*6: 21.7A for AS4777.2.

\*7: Can be reached only if PV and battery power is enough.

\*8: The standard configuration is CAN.



## Product Strengths

Save money up to zero cost



Uninterrupted power supply, 10ms reaction

# UPS

Up to 10 years warranty supported by strong bankability



Easy WiFi setup via remote APP settings



Fanless design, long lifespan



Charge battery @ off-peak price



## Project Cases



# GOODWE GOOD CHOICE

## GoodWe (China)

No.189 Kunlunshan Rd., SND, Suzhou, 215163, China  
T: +86 (0) 512 6239 7998  
sales@goodwe.com  
service.chn@goodwe.com

## GoodWe (Brazil)

Rua Abelardo 45, Recife/PE, 52050-310  
T: +55 54 992504491  
sales@goodwe.com  
servico.br@goodwe.com

## GoodWe (UK)

6 Dunhams Court, Dunhams Lane, Letchworth  
Garden City, SG6 1WB UK  
T: +44 (0) 333 358 3184  
enquiries@goodwe.com.uk  
service@goodwe.com.uk

## GoodWe (Italy)

Via Cesare Braico 61, 72100 Brindisi, Italy  
T: +39 338 879 38 81; +39 831 162 35 52  
valter.pische@goodwe.com  
service.it@goodwe.com

## GoodWe (Australia)

Level 14, 380 St. Kilda Road, Melbourne,  
Victoria, 3004, Australia  
T: +61 (0) 3 9918 3905  
sales@goodwe.com  
service.au@goodwe.com

## GoodWe (Korea)

8F Invest Korea Plaza, 7 Heoleung-ro  
Seocho-gu Seoul Korea (06792)  
T: +82 (2) 3497 1066  
sales@goodwe.com  
Larry.Kim@goodwe.com

## GoodWe (Germany)

Fürstenrieder Str. 279a 81377 München, Germany  
T: +49 8974120210 +49 421 83570-170 (Service)  
sales.de@goodwe.com  
service.de@goodwe.com

## GoodWe (Netherlands)

Franciscusdreef 42C, 3565AC Utrecht, the Netherlands  
T: +31 (0) 30 737 1140  
sales@goodwe.com  
service.nl@goodwe.com

## GoodWe (India)

1202, G-Square Business Park, Sector 30A, Opp. Sanpada  
Railway Stn., Vashi, Navi Mumbai- 400703  
T: +91 (0) 2249746788  
sales@goodwe.com  
service.in@goodwe.com

## GoodWe (Turkey)

Adalet Mah. Megapol Tower K: 9 No: 110 Bayraklı - Izmir  
T: +90 (232) 935 68 18  
info@goodwe.com.tr  
service@goodwe.com.tr

## GoodWe (Mexico)

Oswaldo Sanchez Norte 3615, Col. Hidalgo, Monterrey,  
Nuevo Leon, Mexico, C.P. 64290  
T: +52 1 81 2871 2871  
sales@goodwe.com  
soporte.latam@goodwe.com

Note: The technical data above mentioned may be modified in order to reflect the continuous technical innovation and the improvements achieved by GoodWe's R & D team. GoodWe has the sole right to make such modification at any time without further notice. The GoodWe's customers have the right to request the latest version of the GoodWe products data sheets and all the commercial contracts that may be signed will be based on the most recent version of the data sheet at the moment of signing the contract.

Copyright © GoodWe Power Supply Technology Co., Ltd. 2019. All rights reserved.  
No part of this document may be reproduced or transmitted in any form or by any means without prior written consent of GoodWe Power Supply Technology Co., Ltd.

[www.goodwe.com](http://www.goodwe.com)